

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Star Trading

**Supplier's address:** Help desk, Star Street 1, 51250 Svenljunga, SE

**Model identifier:** 355-61-1

## Type of light source:

|                                                     |     |                                 |                            |
|-----------------------------------------------------|-----|---------------------------------|----------------------------|
| Lighting technology used:                           | LED | Non-directional or directional: | NDLS                       |
| Light source cap-type (or other electric interface) | E14 |                                 |                            |
| Mains or non-mains:                                 | MLS | Connected light source (CLS):   | No                         |
| Colour-tuneable light source:                       | No  | Envelope:                       | -                          |
| High luminance light source:                        | No  |                                 |                            |
| Anti-glare shield:                                  | No  | Dimmable:                       | Only with specific dimmers |

## Product parameters

| Parameter                                                                                                                                             |        | Value                | Parameter                                                                                                                                                  | Value                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| General product parameters:                                                                                                                           |        |                      |                                                                                                                                                            |                        |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         |        | 2                    | Energy efficiency class                                                                                                                                    | G                      |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) |        | 100 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 100                  |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     |        | 1,5                  | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | 0,00                   |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                |        | -                    | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 90                     |
| Outer dimensions without separate control gear, light-                                                                                                | Height | 143                  | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                       | Width  | 95                   |                                                                                                                                                            |                        |
|                                                                                                                                                       | Depth  | 95                   |                                                                                                                                                            |                        |


|                                                                                                                         |      |                                       |                |  |
|-------------------------------------------------------------------------------------------------------------------------|------|---------------------------------------|----------------|--|
| ing control parts and non-lighting control parts, if any (millimetre)                                                   |      |                                       |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -    | If yes, equivalent power (W)          | -              |  |
|                                                                                                                         |      | Chromaticity coordinates (x and y)    | 0,516<br>0,415 |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |      |                                       |                |  |
| R9 colour rendering index value                                                                                         | 63   | Survival factor                       | 0,90           |  |
| the lumen maintenance factor                                                                                            | 0,93 |                                       |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |      |                                       |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,96 | Colour consistency in McAdam ellipses | 6              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)     | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 0,3  | Stroboscopic effect metric (SVM)      | 0,0            |  |

(a) '-': not applicable;


(b) '-': not applicable;

*Spectrum*

*1.0=2.621mW/nm*

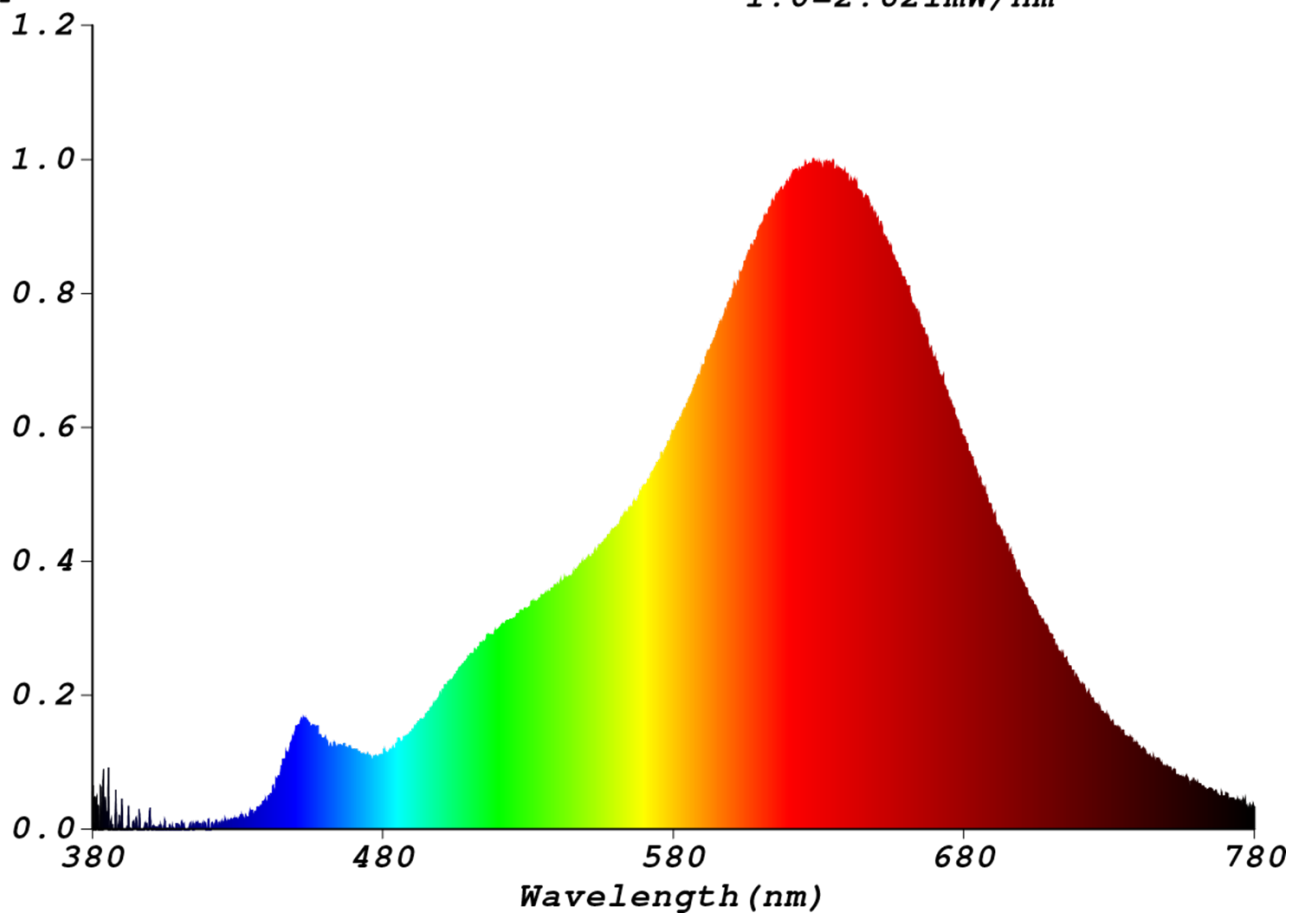

Model placed on the Union market from 02/07/2019



**EPREL registration number:** 795197

<https://eprel.ec.europa.eu/qr/795197>

**Supplier:** Star Trading i Svenljunga AB (Manufacturer)

**Website:** [www.startrading.com](http://www.startrading.com)

**Customer care service:**

**Name:** Help desk

**Website:** [www.startrading.com](http://www.startrading.com)

**Email:** [kundtjanst@startrading.com](mailto:kundtjanst@startrading.com)

**Phone:** +4632512000

**Address:**

Star Street 1  
51250 Svenljunga  
Sweden