

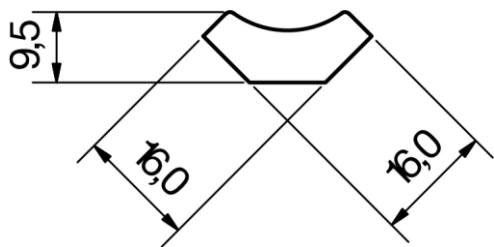
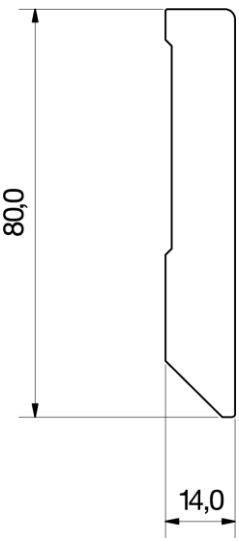
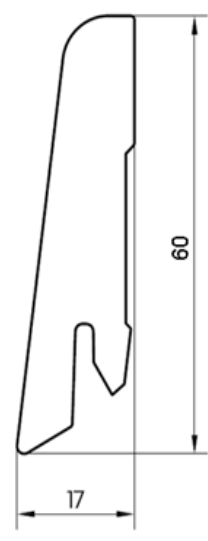
Technical data sheet

EGGER Decor Skirtings

Application area

Preparation of wall endings after installation of EGGER flooring

Material data

Parameter	Unit			
Surface		Melamin-/ urea impregnated decor paper		
Carrier material		MDF (medium density fibreboard)		
Product		Beading profile 1,6 cm with adhesive strip	Skirting 8 cm cubical	Skirting 6 cm
Profile drawing				
Length	mm	2400	2400	2400
Thickness	mm	16	14	17
Width	mm	16	80	60
Color		See decor list skirting		
Paintable		No		
Methode of use		self-adhesive strip	adhesive (SMP construction adhesive or 1K PU adhesive) tacking (compressed-air tacker)	Clipstar (distance 25-50 cm depending on the wall construction)
		Tape strips only with adhesive tapes that do not exceed an adhesive force of 2N/cm according to DIN EN 1939		

General data

Parameter		Test method
Formaldehyde Emission	E 1	EN 120
VOC-and Formaldehyde emission	A+	ISO 16000 part 3, 6, 9, 10
Light resistance	level 7	EN 20105
Recycling	recyclable	
Disposal	in burning plant/ incinerator	
Cleaning	Using a vacuum cleaner With detergent pH < 8 and a damp cloth Avoid heavy accumulations of water	
Storage	Standing or lying on an even base Protect it from direct sunlight and moisture Climatic conditions: temperature 18° C, humidity 55 – 70 %	

Logistic parameters

Description	Parameter	Beading profile 1,6 cm with adhesive strip	Skirting 8 cm cubical	Skirting 6 cm
Specifications package	Quantity	25	5	10
	Linear meter	60	12	24
	Dimensions [mm]	2.410 x 125 x 45	2.410 x 86 x 69	2.410 x 135 x 65
	Weight [kg] +/- 10 %	6,7	9,1	9,7
Specifications pallet	Quantity	600	380	400
	Linear meter	1440	912	960
	Dimensions [mm]	2.450 x 800 x 320	2.450 x 800 x 700	2.450 x 800 x 670
	Weight [kg] +/- 10 %	176	650	400

The tolerance for cross section mass, longitudinal dimensions as well as distortion and bend corresponds RAL-RG 432.

We confirm that in the manufacturing process, in the semi-finished goods and in the skirting's itself no top coating, no paints, no lacquers and no adhesives with organic solvents, biocides and free formaldehyde are used and contained.

Information

All above mentioned values were determined under laboratory conditions and defined laboratory materials and structures and may with different system flooring components deviate from these test values. For all of the mentioned performance values inaccuracies are possible owing to the testing methods.

The information given above is based on our current state of knowledge and should be used for information of our product application. This should not be taken to as an assurance of certain quality of our products or their use for specific purposes. Subject to change, legal obligations cannot be derived from the information in this document. Existing commercial protective rights are to be observed.

A note on validity

This technical data sheet has been carefully drawn up to the best of our knowledge. It is intended for information only and does not constitute a guarantee in terms of product properties or suitability for specific applications. We accept no liability for any mistakes, errors in standards, or printing errors. In addition, technical changes may result from the further development of EGGER accessories as well as changes to standards and public law documents. This technical data sheet is not an instruction for use and is not a legally binding document.