

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Kobi

**Supplier's address:** Kobi LIGHT, Boya-Żeleńskiego 2, 35-105 Rzeszów Rzeszów podkarpackie, PL

**Model identifier:** LED G9 3W 3000K

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	G9		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	285 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	3,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	53	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	21	
	Depth	21	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,441 0,402
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	78	Beam angle in degrees, or the range of beam angles that can be set	120
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	0	Survival factor	0,90
the lumen maintenance factor	0,98		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9

(a) '-': not applicable;

(b) '-': not applicable;

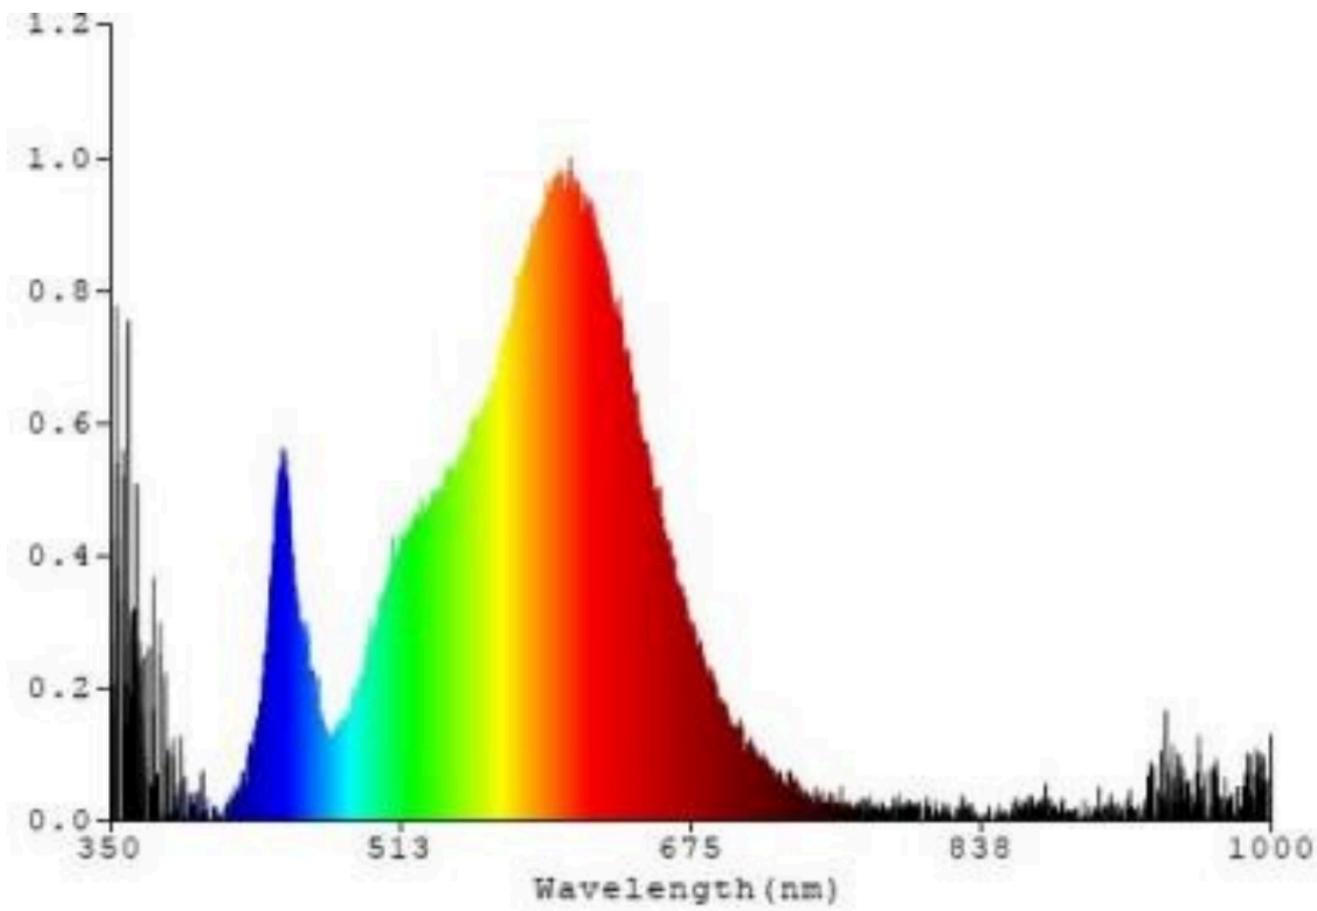

Model placed on the Union market from 28/09/2023



**EPREL registration number:** 1682098

<https://eprel.ec.europa.eu/qr/1682098>

**Supplier:** KOBİ LIGHT SPÓŁKA Z OGRANICZONĄ ODPOWIEDZIALNOŚCIĄ (Importer)

**Website:** [www.kobi.pl](http://www.kobi.pl)

**Customer care service:**

**Name:** Kobi LIGHT

**Website:** <https://kobi.pl/>

**Email:** [techniczny@kobi.pl](mailto:techniczny@kobi.pl)

**Phone:** 515329063

**Address:**

Boya-Żeleńskiego 2  
35-105 Rzeszów  
Poland