


ASSEMBLY INSTRUCTIONS 4M OPENING PANEL

BSO4MRDNS / BSO4MRDB



Before starting assembly of your product, make sure you wear the necessary personal protective equipment and consult the assembly instructions.

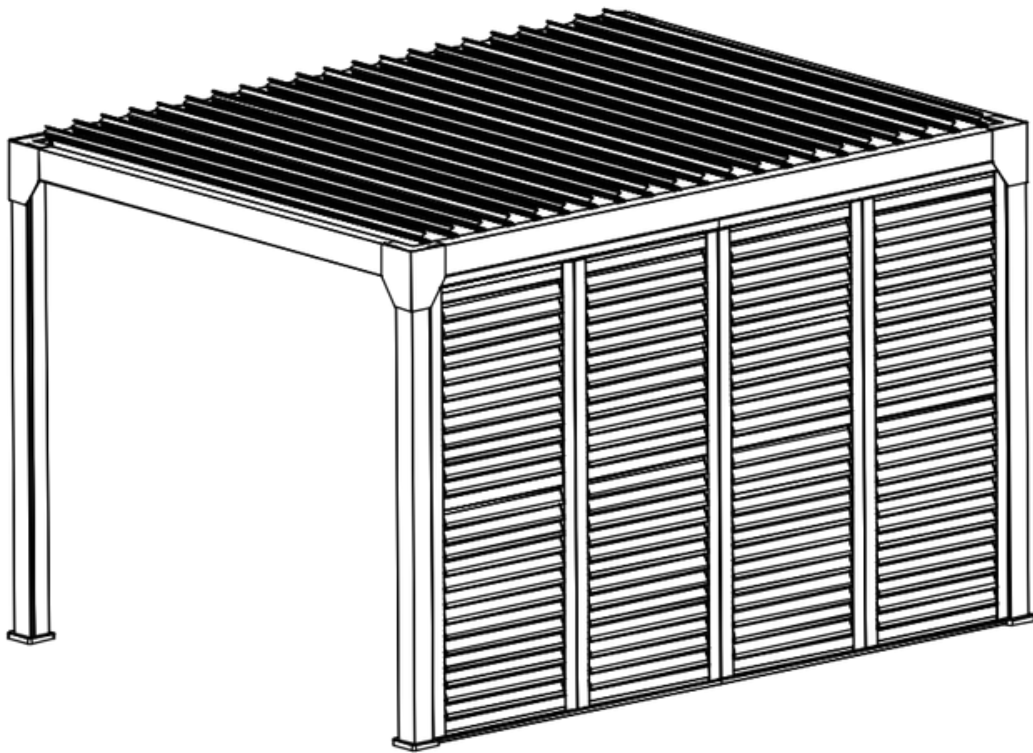

sav@green-outside.com



LE TRI + FACILE NOTICE PAPIER & CARTON




PAP


TABLE OF CONTENTS

1. SAFETY INFORMATION AND INSTRUCTIONS	-----	P.3
1.1 Tools needed	-----	p.3 p.3
1.2 Safety instructions	-----	p.3
1.3 Unpacking and checking the contents	-----	p.3
1.4 Maintenance Tips	-----	
2. LIST OF COMPONENTS	-----	P.4
3. PANEL ASSEMBLY	-----	P5
4. TROUBLESHOOTING & FREQUENTLY ASKED QUESTIONS	-----	P.15
5. WARRANTY AND CONTACT	-----	P.16


1. SAFETY INFORMATION AND INSTRUCTIONS

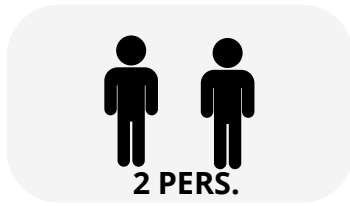


1.1 Tools needed




1 x 13/10 open-end wrench (INCLUDED)



1 Phillips screwdriver (PH1)



1 hammer drill / rotary hammer



1 concrete drill bit Ø6



1 stepladder / person



1 hammer

1.2 Safety instructions

To ensure the safe assembly of your product, certain rules must be followed:

- Wearing personal protective equipment is strongly recommended (gloves, safety shoes, goggles, etc.)
- Keep children away from the construction site
- Choose a suitable location for mounting your product (flat, hard ground allowing for solid anchoring, not subject to strong winds)
- Ensure that the fixing points do not coincide with cable passages, conduits or other pipes.
- In the case of installing a pergola, provide a ground with a 1% slope to allow for the drainage of rainwater.
- Do not attempt assembly in adverse weather conditions (rain, wind, snow, etc.)
- In case of bad weather (wind, rain, snow) it is recommended to keep the blades in a semi-open position to promote airflow and prevent snow accumulation.

1.3 Unpacking and checking the product





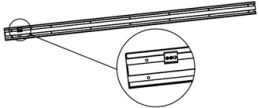
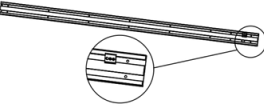
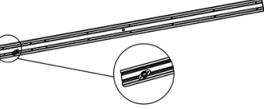
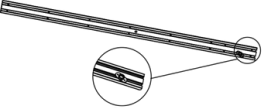






When opening the boxes, be careful not to use a box cutter or any blade that could damage the product. The boxes are labeled with the components inside. Make sure you have all the items listed in the components list and that they are correct before you begin assembling your product.

1.4 Maintenance Tips


- We recommend regularly cleaning your product by removing leaves, branches, or other elements that could impair its proper functioning.
- Your product can be cleaned with soapy water.
- Never use a high-pressure cleaner, corrosive products, or solvents.


In the event that a component is missing, damaged, or if you have any doubts, please contact Green Outside customer service:
sav@green-outside.com

2. List of components


Reference	Component	Quantity	Representation
A	Left outer leaf	1	
B	Left inner door	1	
C	Right-hand inward leaf	1	
D	Right-hand exterior leaf	1	
AND	Upper left rail	1	
F	Top right rail	1	
G	Lower left rail	1	
H	Right bottom rail	1	
I	Roulette	2	
1	Vis autoforeuse 5x14	32	
2	Vis M4x30	32	
3	6x30mm Anchor	32	
4	13/10 open-end wrench	1	
5	13mm open-end wrench	1	


3. Panel mounting

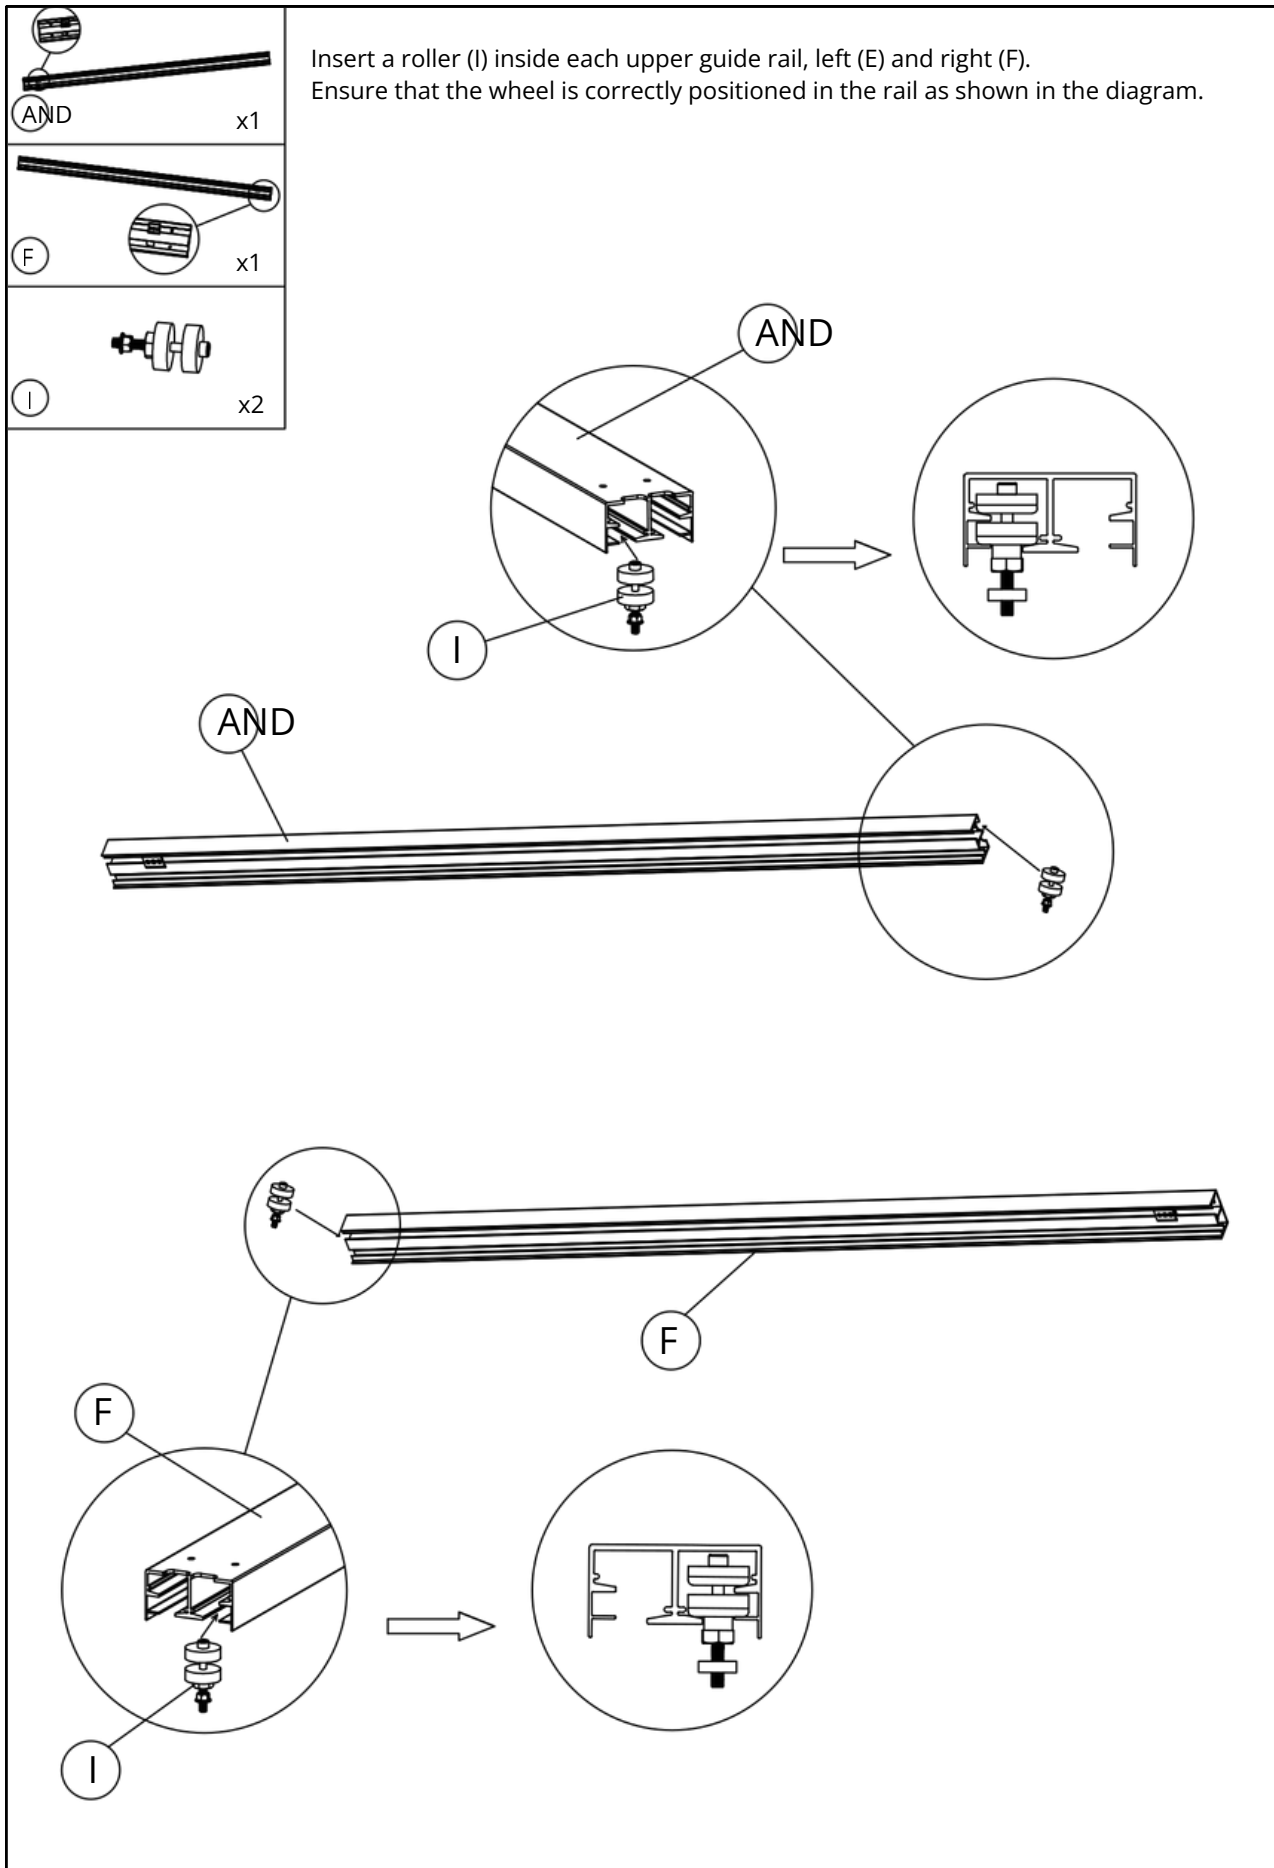


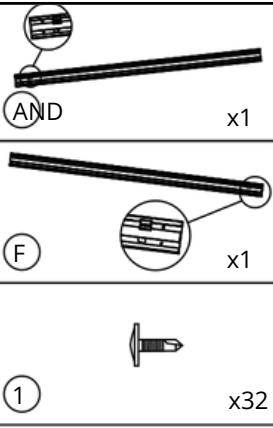



Position the rails under the pergola beam.
 After checking that the rails are perfectly parallel to the outer edge of the beam, fix them using the 32 screws (1).

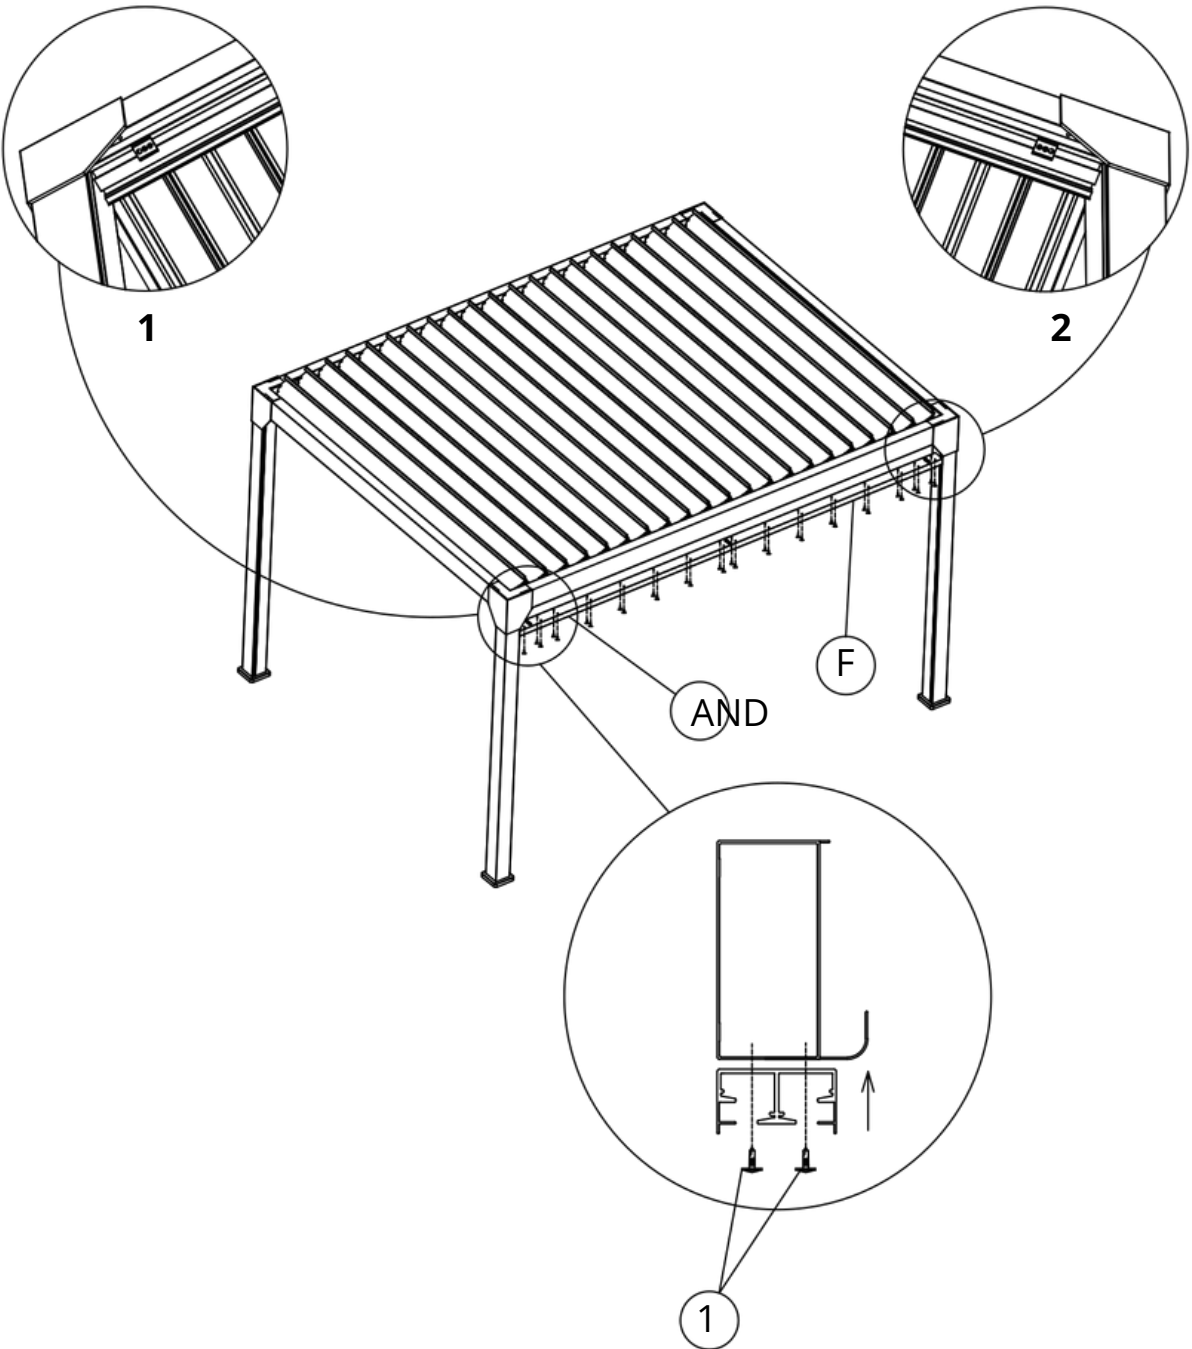

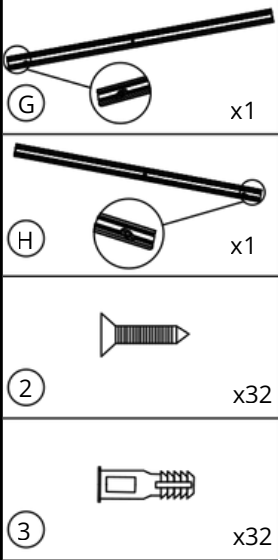


Align the bottom rail (G) and (H) with the ground, ensuring that their outer edge is perfectly aligned with the outside of the pergola post (Diagram 1). Mark the locations, drill the floor, insert the dowels (3) and fix the rails with the screws (2).

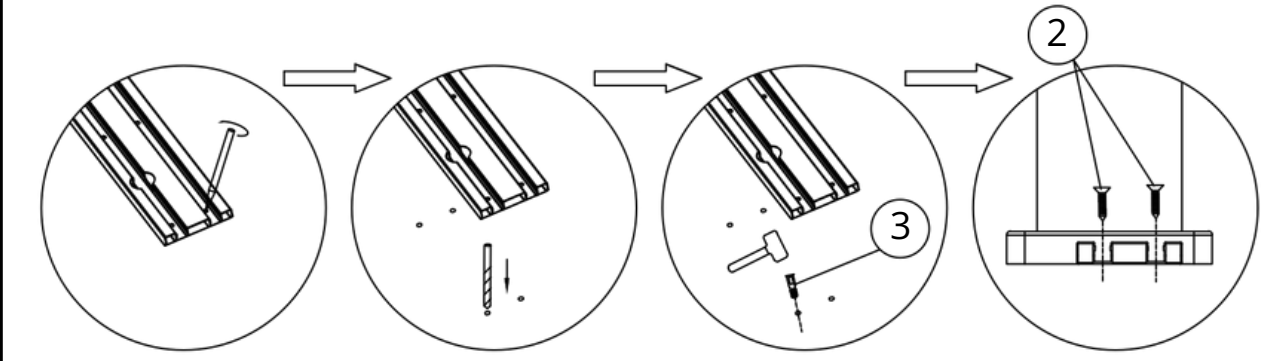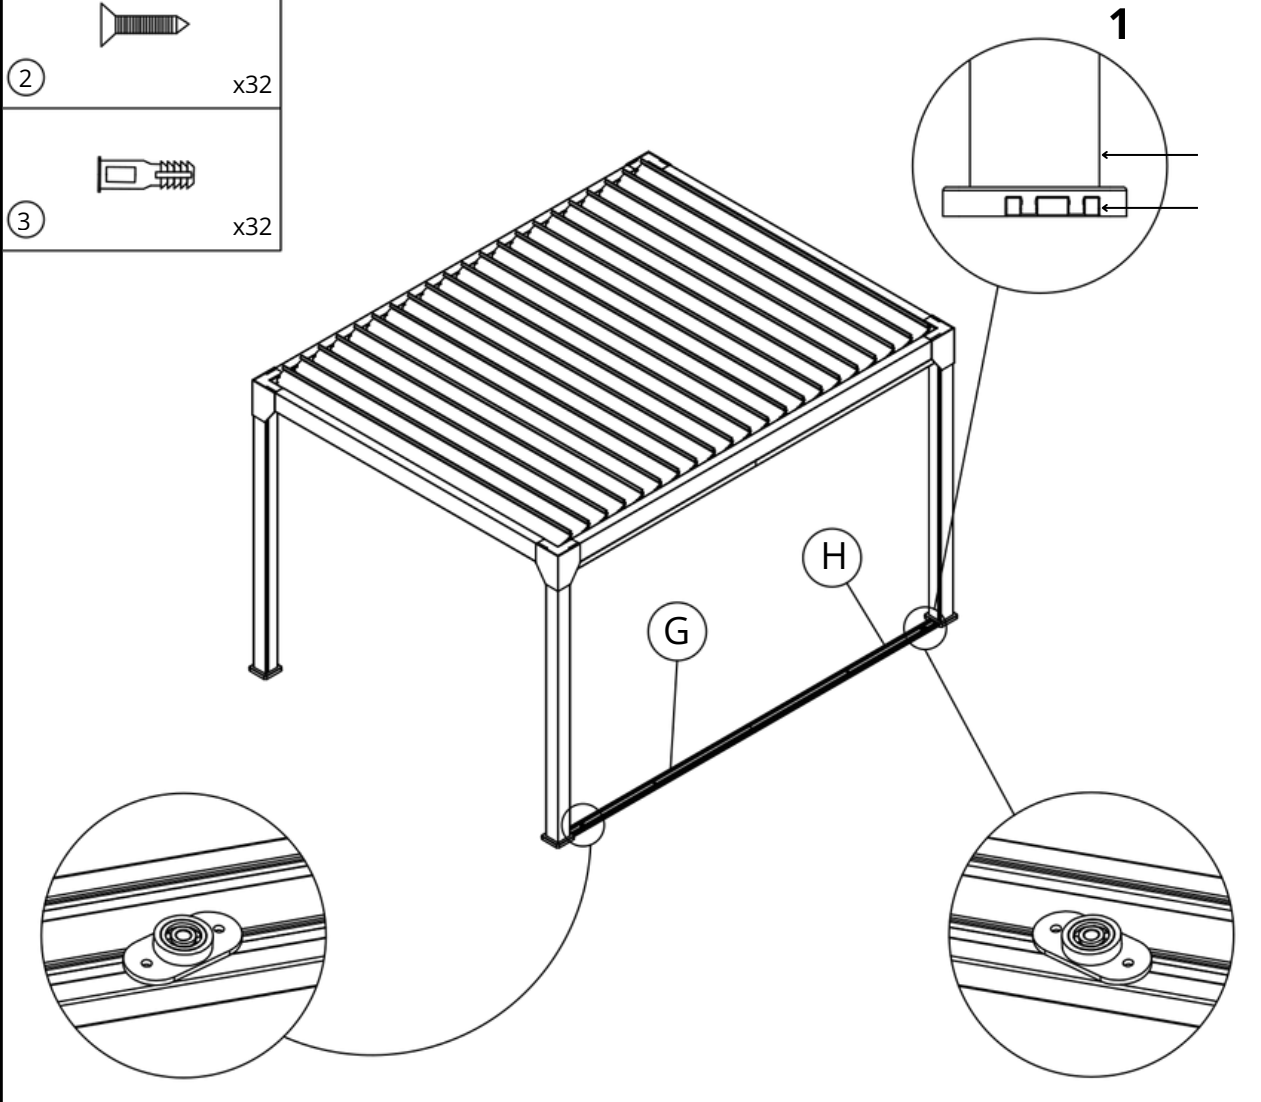




Connect the two leaves (A) and (B) by fitting them together using their hinges.

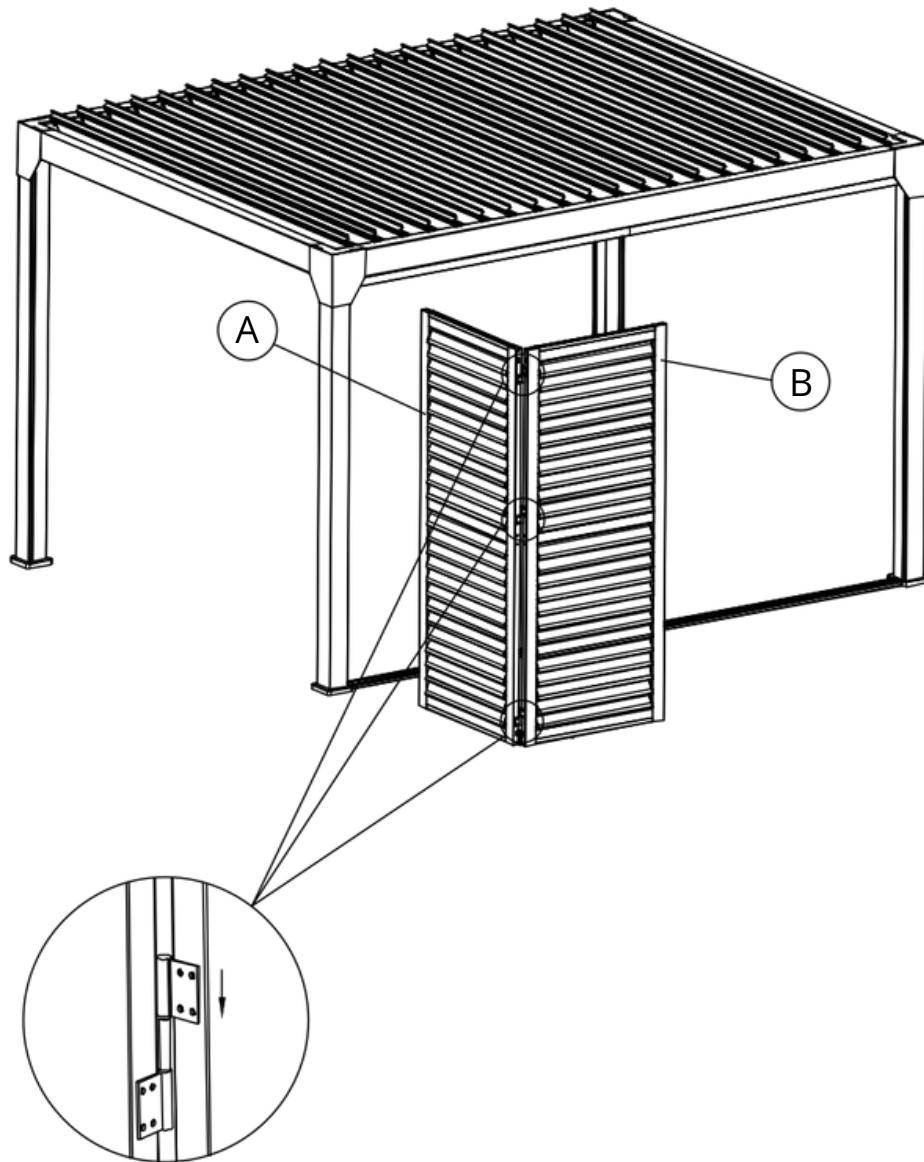





Turn the top screw with the key (4) clockwise to raise the frame until the bottom guide is perpendicular to the floor rail.
Then turn counterclockwise to gently lower the frame into the first groove of the rail. A gap of 8 to 10 mm must be maintained.

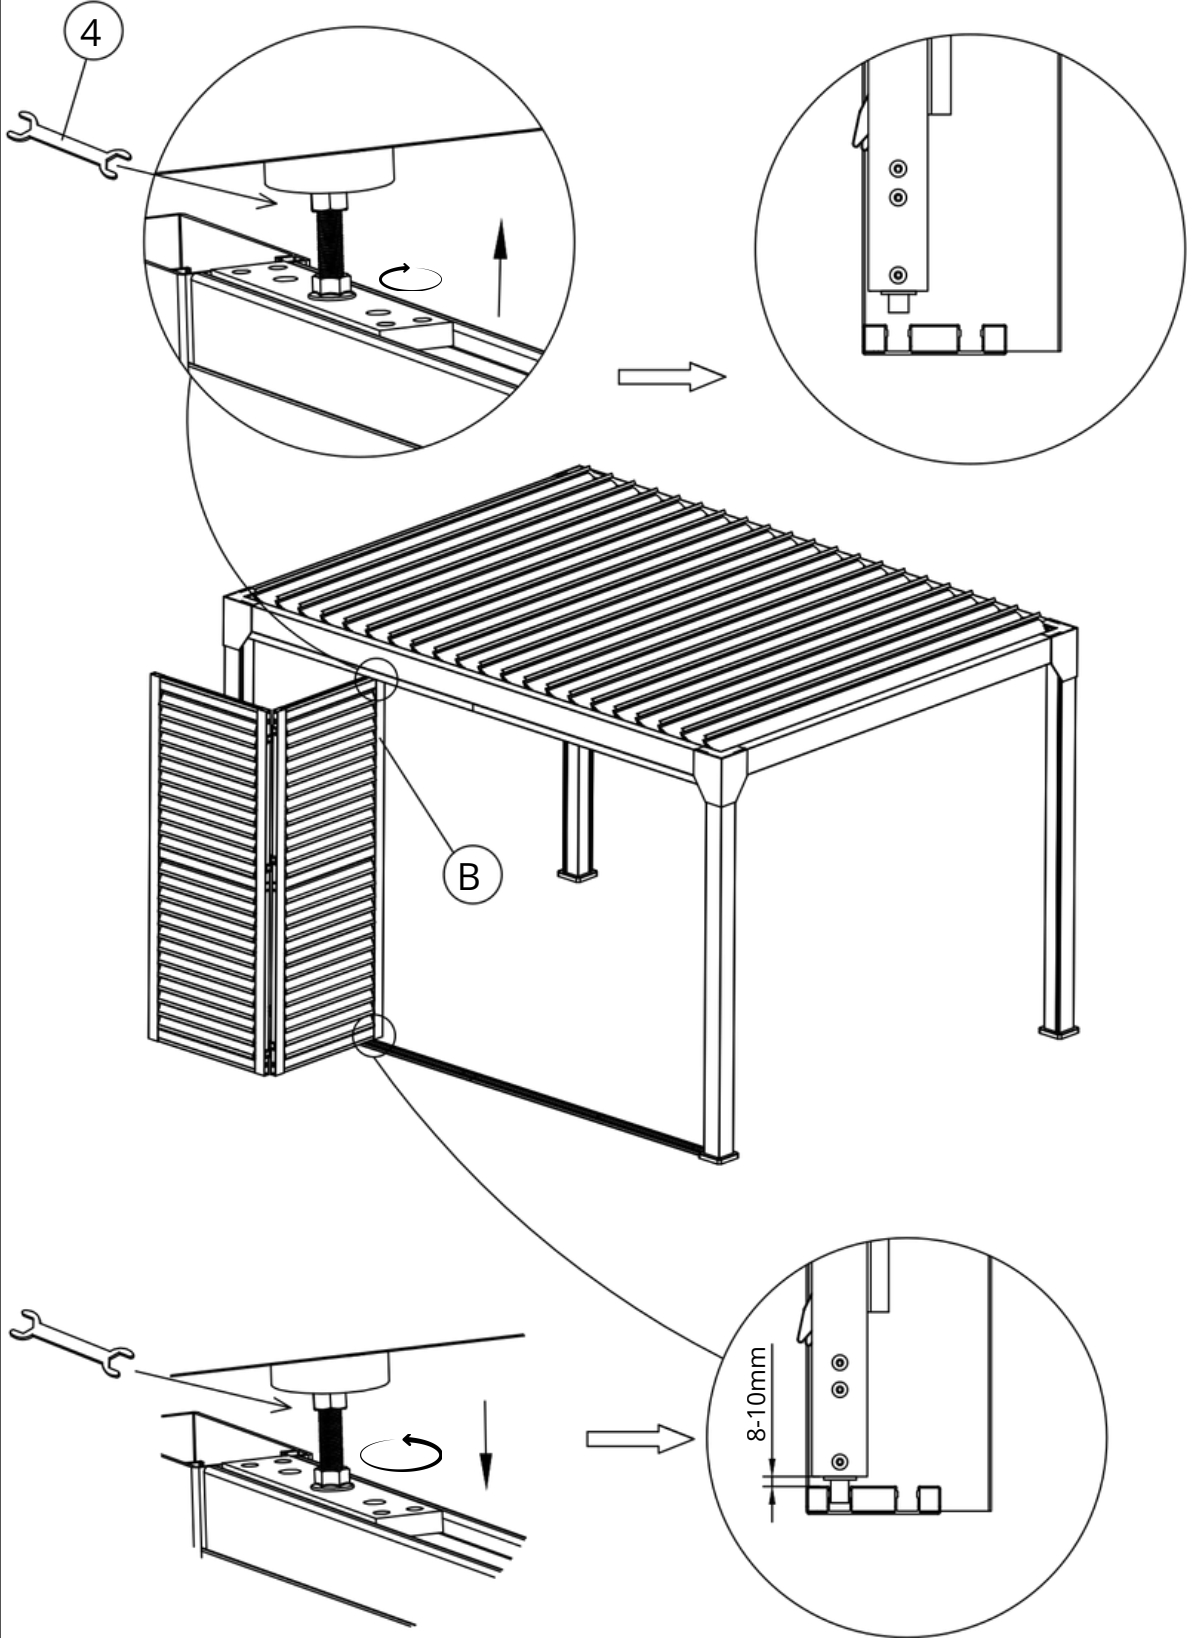



- Position the bottom of the door leaf (A) on the floor rail so that the lower axle fits directly into the rail guide.
- Press the spring-loaded button located at the top of the upright to lower the safety rod.
- Align the panel vertically, then release the spring so that the rod clicks into the hole in the slide located in the upper rail.
- Make sure the panel is perfectly straight and that it pivots and slides freely in its rails.

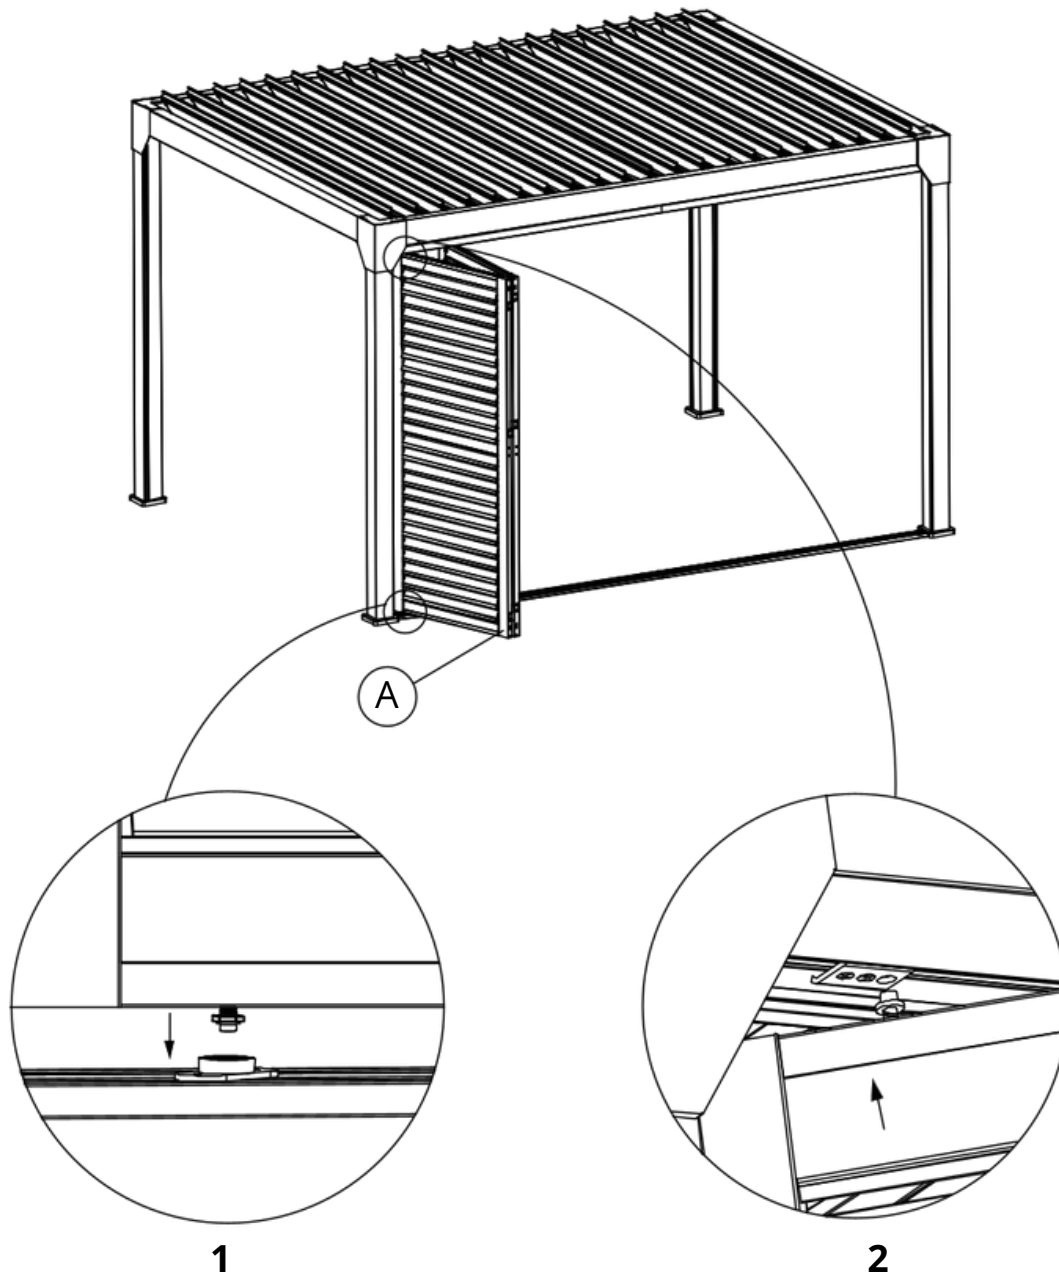




Connect the two leaves (C) and (D) by fitting the hinges provided for this purpose.

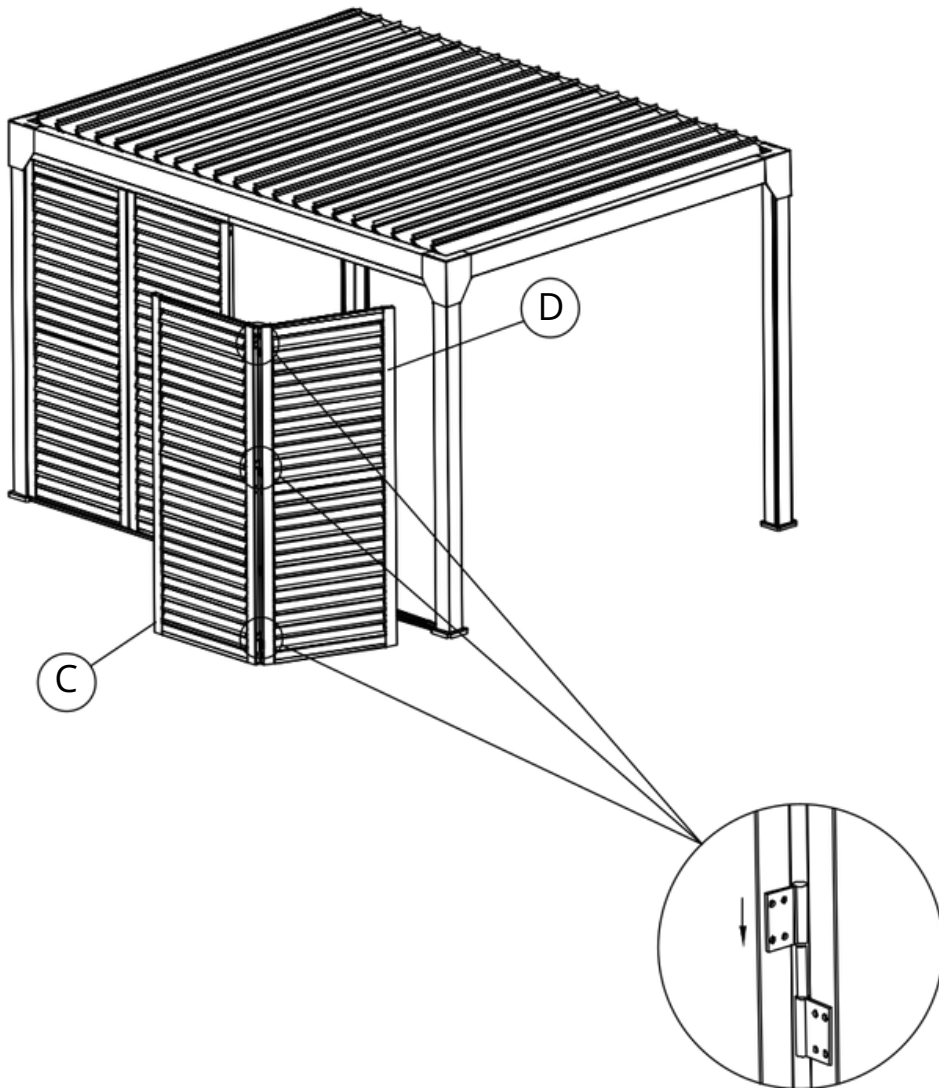




Turn the top screw with the key (4) clockwise to lift the frame.
Then turn counterclockwise to gently lower the frame into the first groove of the rail. A gap of 8 to 10 mm must be maintained.

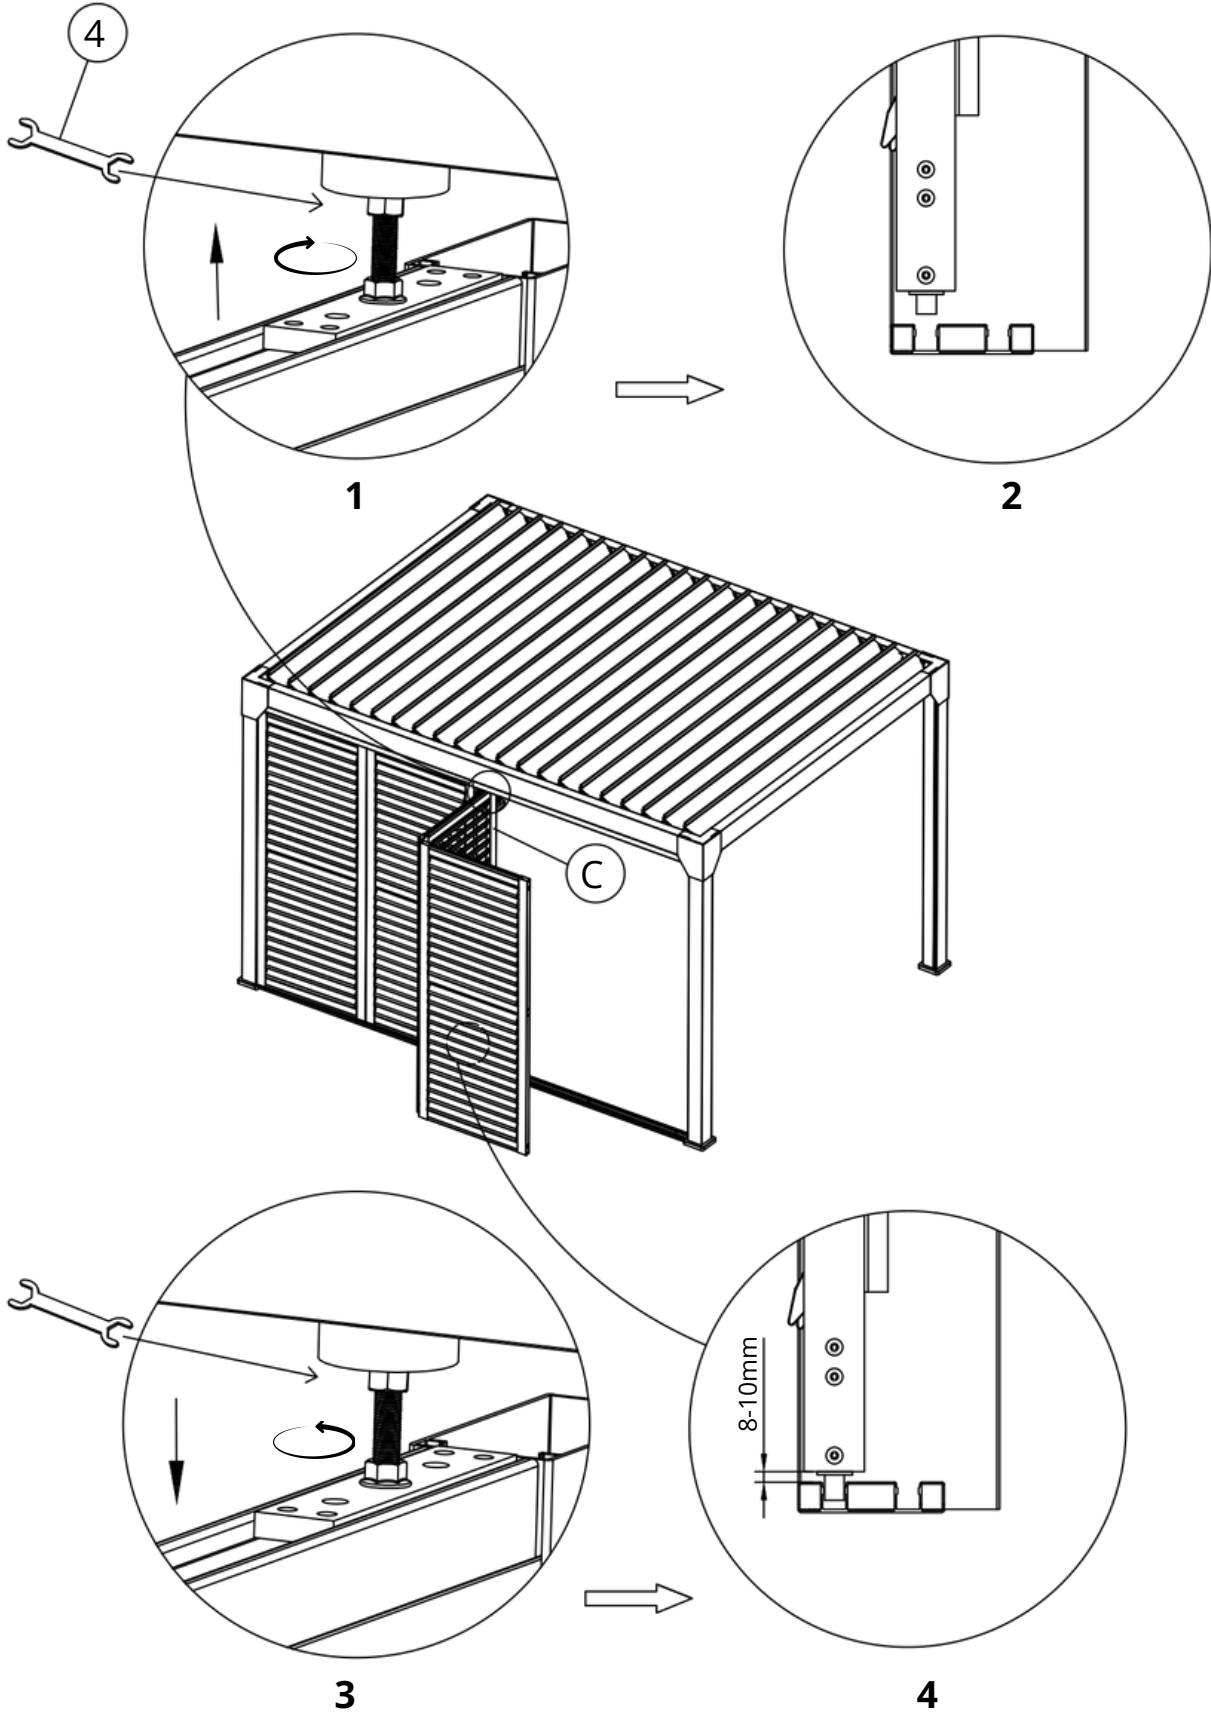

- Position the bottom of the door leaf (D) on the floor rail so that the lower axle fits directly into the rail guide.
- Press the spring-loaded button located at the top of the upright to lower the safety rod.
- Align the panel vertically, then release the spring so that the rod clicks into the hole in the slide located in the upper rail.
- Make sure the panel is perfectly straight and that it pivots and slides freely in its rails.



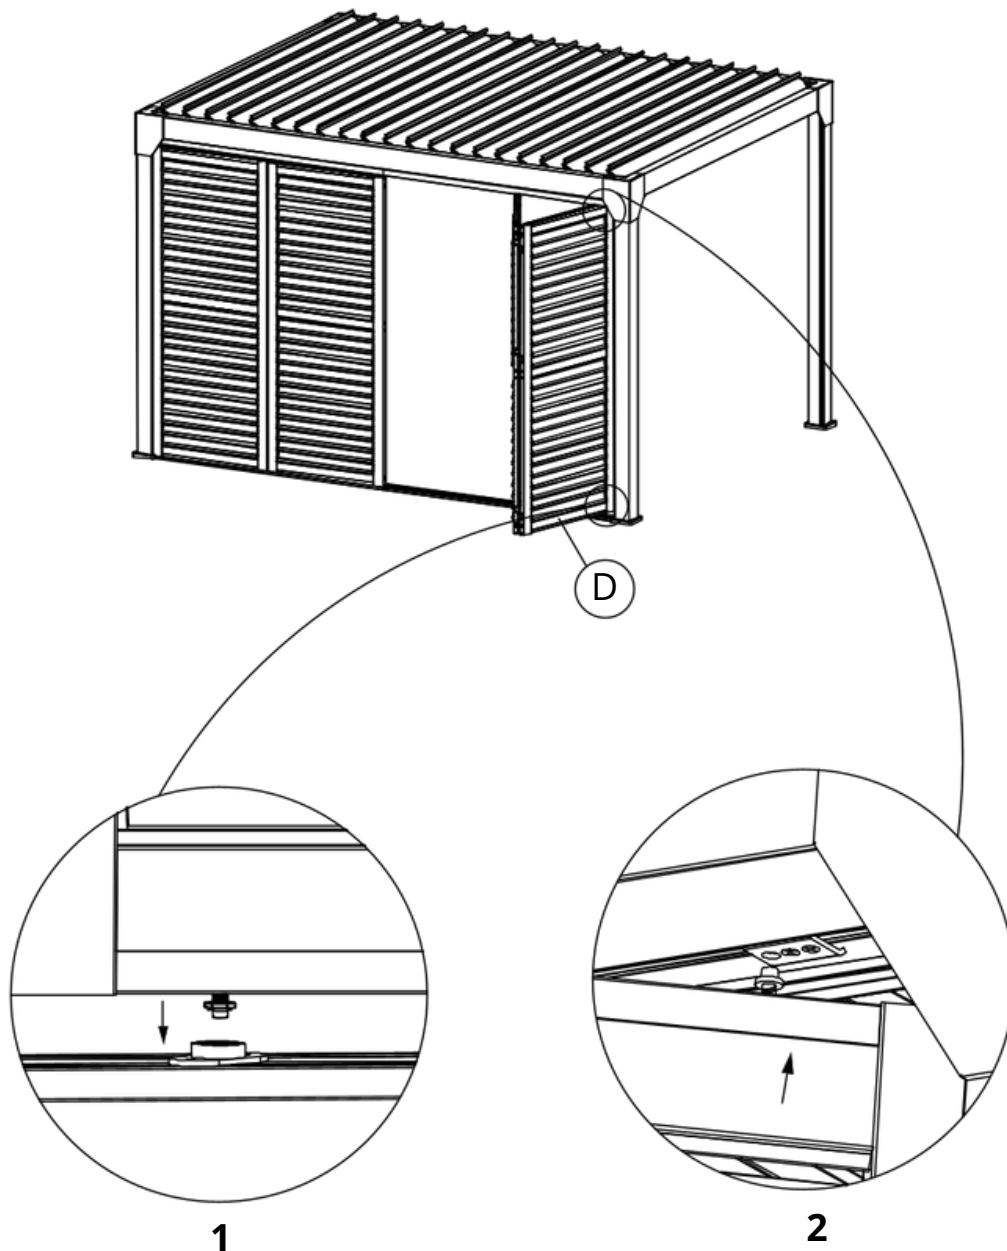




⑤

x1

Use the key (5) on the lower fixings to ensure that all the panels are perfectly level with the floor.

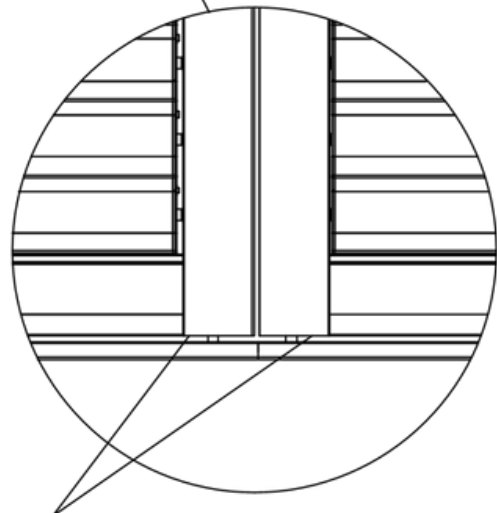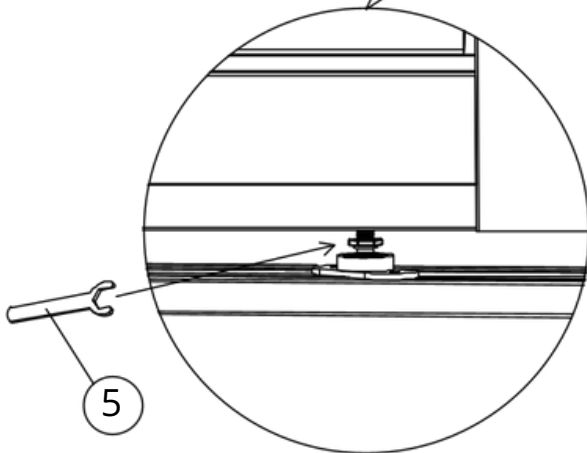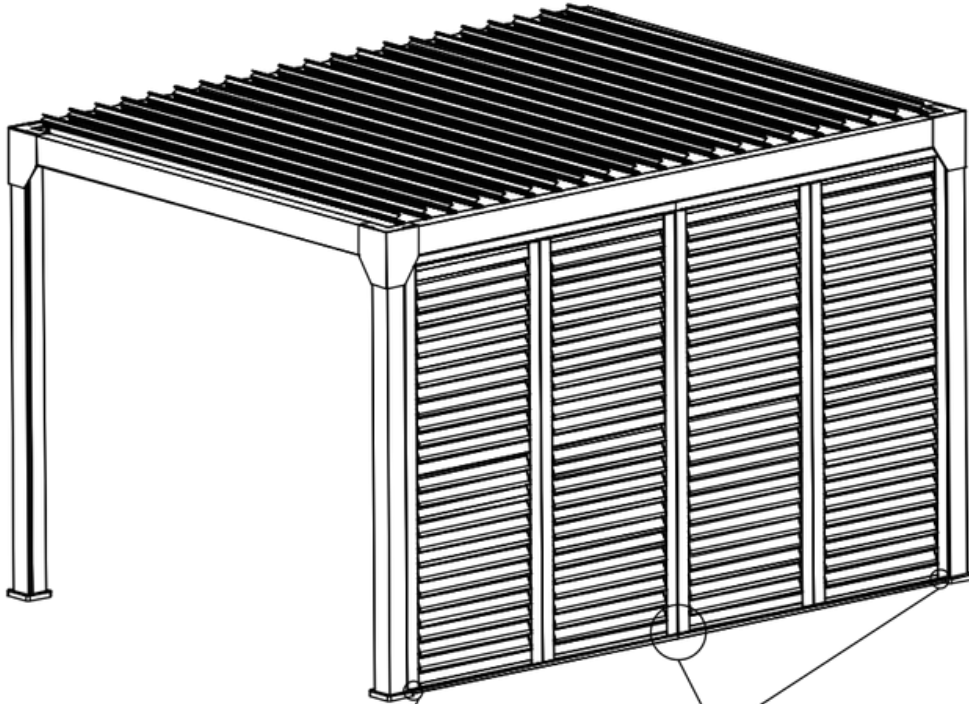

level relative to the ground

4. Troubleshooting & Frequently Asked Questions

- **Do I need to take any steps before installing my products?**

Installing a bioclimatic pergola, carport or garden shed requires some administrative procedures depending on its dimensions and location.

Our garden sheds have a footprint of 5m² to 20m² and are subject to prior declaration of works. For our models smaller than 5m², you do not need planning permission, but you must still comply with the rules of the Local Urban Development Plan (PLU) or equivalent urban planning document.

Bioclimatic pergolas and carports with a surface area greater than 5m² and less than or equal to 20m² are subject to prior declaration of works.

For bioclimatic pergolas and carports with a surface area greater than 20m², you must submit a building permit application.

Special cases:

- Classified site or protected area: before any installation, it is necessary to obtain the agreement of the Architects of the Buildings of France (ABF).
- Condominium regulations: if you are in a condominium, authorization from the general meeting may be required.
- Local Urban Planning (PLU): some municipalities have specific restrictions (height, color, materials), it is advisable to consult the town hall before purchasing a product.

The development tax:

Garden sheds larger than 5m² are subject to the development tax, unless exempted by the municipality. The amount is calculated on a flat-rate basis per m² and varies depending on the location.

- **Can I order the accessories for my bioclimatic pergola at a later date?**

Yes, our bioclimatic pergolas are modular. Various accessories can be added later. Please be careful to check the compatibility of the accessories with your pergola model before placing your order.

- **How does the delivery of my products work?**

Our garden sheds, bioclimatic pergolas, and sunshades are delivered by a carrier. They will contact you to schedule a delivery appointment, which will be made using a semi-trailer equipped with a forklift.

Our curtains are delivered by a traditional carrier.

For a stress-free assembly, find all our assembly instructions in video format on our YouTube page and on our website by clicking on the following link or by scanning the QR code.

<https://www.youtube.com/@greenoutside8067>



<https://green-outside.com/>



5. Warranty and contact

Your product is covered by a legal guarantee against any manufacturing defects. You can find the details of the Green Outside legal guarantee by clicking on the following link.

<https://green-outside.com/procedure-sav/>

or by scanning the QR code



For any warranty claim or in case of a problem with your product, please contact Green Outside customer service using the following contact details:

sav@green-outside.com

04 74 55 36 54 - Option 2

As part of its policy of continuous improvement, Green Outside reserves the right to modify its products without prior notice.

For more information on Green Outside products:
info@green-outside.com and www.green-outside.com