

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Sencys

Supplier's address: Maxeda DIY, Zelliksesteenweg 65, 1082 Brussels Brussels, BE

Model identifier: 10067582

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	120 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 000
On-mode power (P_{on}), expressed in W	2,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	12	
		Chromaticity coordinates (x and y)	0,527 0,413	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	14	Survival factor	0,90	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,00	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

(a) '-': not applicable;

(b) '-': not applicable;

Light Source Test Report

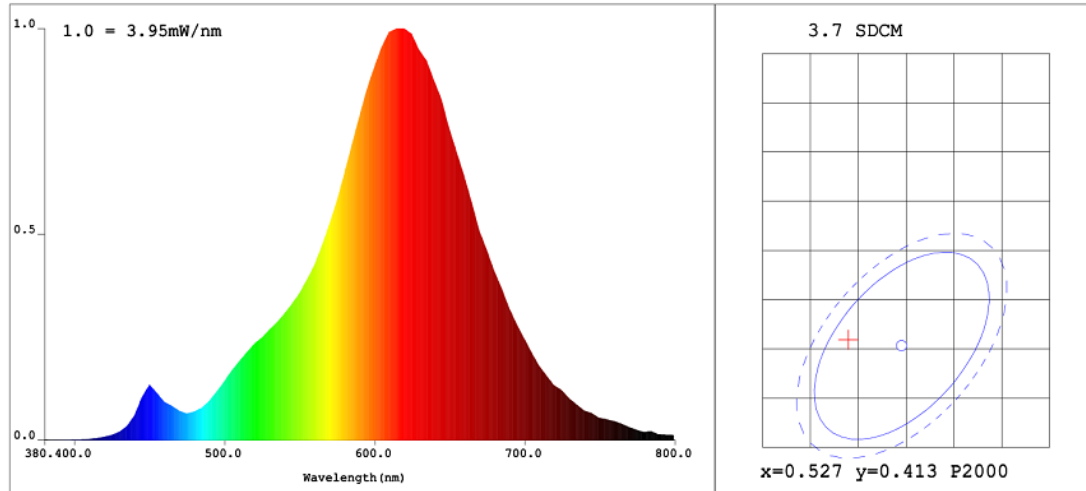

CIE Color Parameters:

Chromaticity Coordinate: $x=0.5210$ $y=0.4139$ $u'=0.3009$ $v'=0.5379$ ($duv=-4.38e-05$)

CCT: $T_c=2052K$ Prcp WaveL: $c\lambda=588.5nm$ Purity=80.6%

Peak WaveL: $\lambda=620nm$ Half Width: $\Delta\lambda=103.3nm$ Ratio: $R=32.8\%$ $G=66.0\%$ $B=1.2\%$

Average Wave: $615nm$ $PB=0.5784$ $PG=1.8641$ $PR=5.7676$ $PT=126.9111$

Rendering Index: $Ra=82.8$ $Ra'=79.6$

$R1=82$ $R2=93$ $R3=94$ $R4=81$ $R5=82$ $R6=95$ $R7=79$ $R8=56$

$R9=14$ $R10=86$ $R11=82$ $R12=87$ $R13=84$ $R14=98$ $R15=73$

Photo Parameters:

Flux: $\Phi=143.11(lm)$ Luminous Efficacy: $71.41(lm/W)$ Luminous Power: $P=501.9(mW)$

Electrical Parameters:

$U=230.2V$ $I=0.01616A$ $P=2.004W$ $PF=0.539$

Instrument Status:

Scan Range: $380.0nm-800.0nm$
REF = 13835

Interval: $5.0nm$


$I_p = 24911(G=6, D=61)$

TMP (PMT) = $33.1degrees$ centigrade Test Mode: Fast Test

Product Type: CL35
Instrument: PMS-80 System
Temperature: $150.0deg$
Test Operator: Damin

Manufacturer: EVERFINE
Test Department: Everfine
Humidity: 65.0%
Test Date: 2021-05-10 16:29

Model placed on the Union market from 01/09/2021



EPREL registration number: 797091

<https://eprel.ec.europa.eu/qr/797091>

Supplier: Maxeda DIY Group B.V. (Manufacturer)

Website: <https://www.maxedadiygroup.com/>

Customer care service:

Name: Maxeda DIY

Website:

Email: raymond.geelen@diymaxeda.com

Phone: +3223333651

Address:

Zelliksesteenweg 65
1082 Brussels
Belgium